

Data Sheet

ARCTIC SHADES

References

67040 - 67056

		U.S. UNITS	METRIC UNITS
TOTAL WEIGHT		15 oz PLY	464 gr/lm
		10 oz PSY	339 gr/m²
ROLL WIDTH		52/54 in.	132/137 cm
GAUGE (average):		0.018 in.	0,457 mm
FABRIC:		Non-woven	
REPEAT:	horizontal	N.A.	N.A.
	vertical	N.A.	N.A.
NOMINAL PATTERN WIDTH:		51 in.	130 cm
HANGING INSTRUCTIONS:		Reverse - Random match	
TENSILE (minimum):		30 x 30 lbf	133 x 133 N
TEAR (minimum):		12 x 12	
ASTM F-793:		Category IV type I	
WA Spec:		W 101 - 2011 type II	




Specially for the contract market, Arte combines design, colour and quality in a magisteral way.


The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly

demanding market, such as fire resistance, shock resistance and washability.

This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

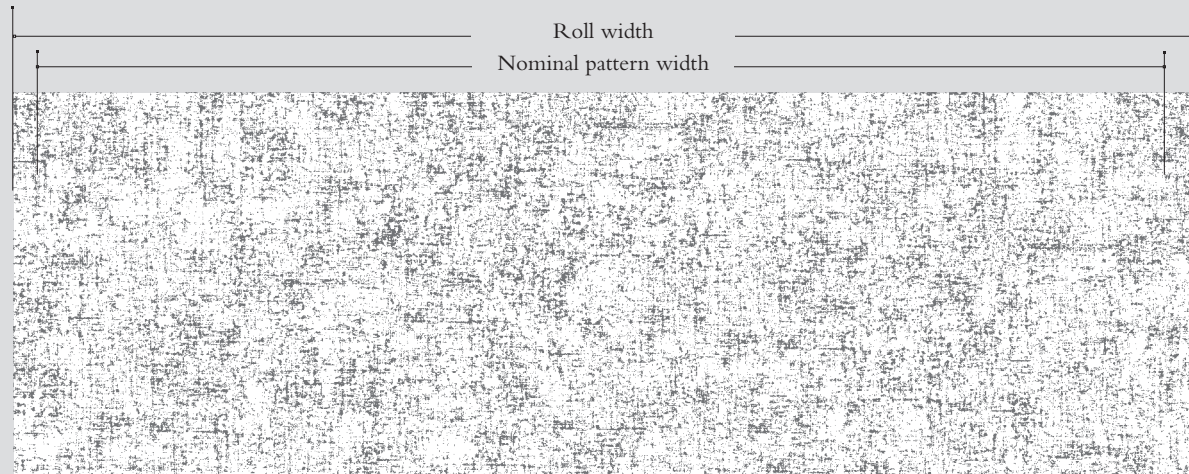

- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
 - "Gauge" is the product thickness measured after the first pattern colourway is produced.
 - "Nominal pattern width" is the expected width yield from one drop on the wall.
 - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

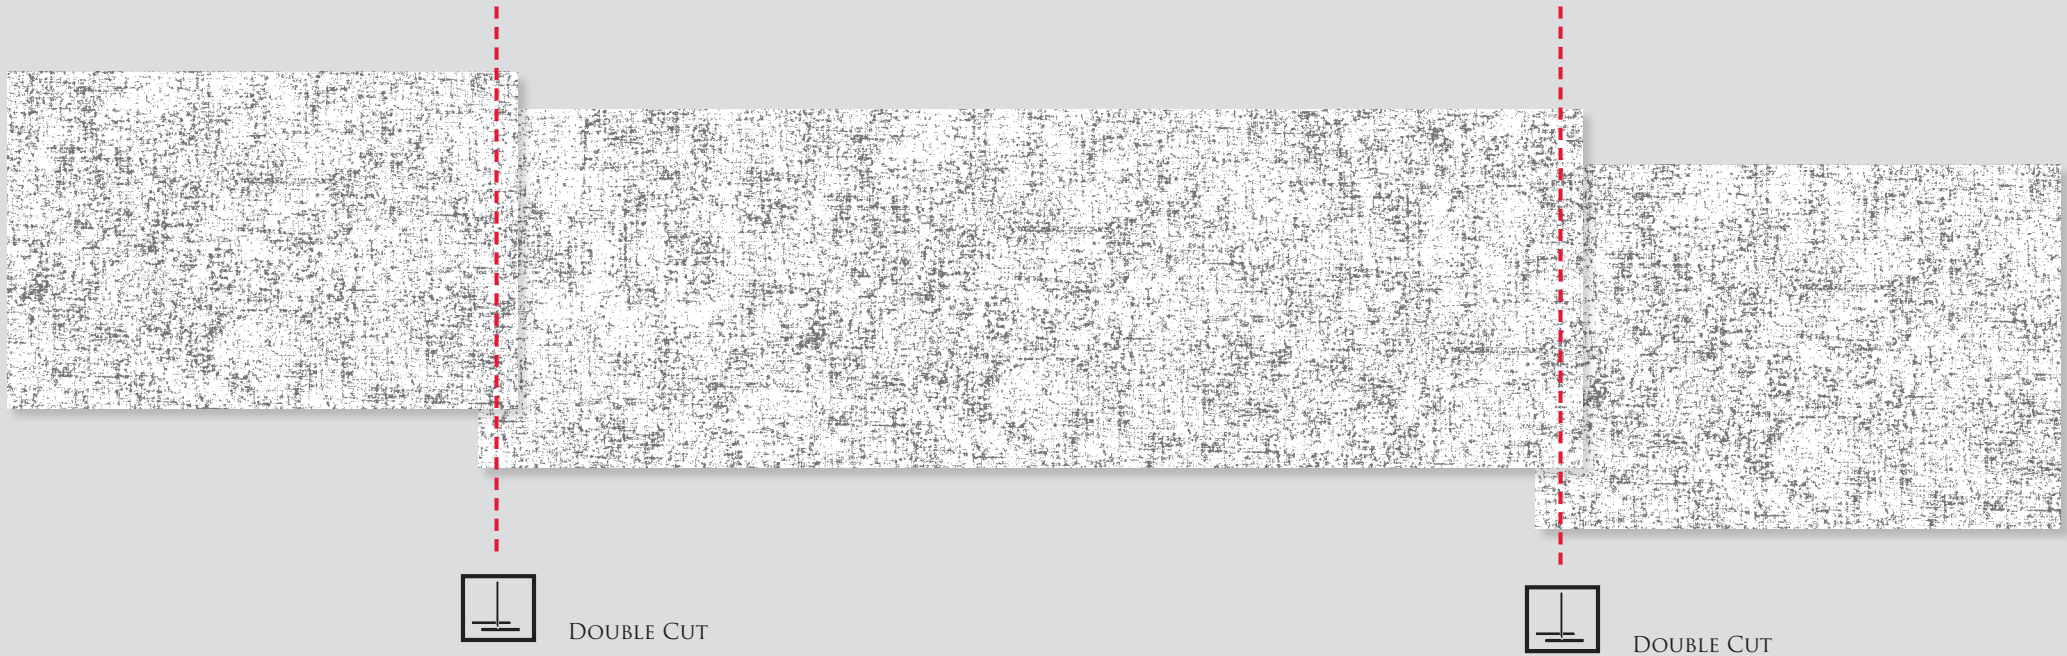

FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®
 NFPA 255 (UL 723, CAN S102M) Tunnel Test¹
 - Class A Rating
 NFPA 286 Corner Burn Test²
 - Meets requirements for Flame Spread, Smoke
 Developed and Flashover

1. When tested on GRC board with A-848-B adhesive
 2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 13501-1:2007 and prEN 15102:2007 + A:2011

Fire Behavior B
 Smoke Production s1
 Flame Droplets d0



1408/13

Product complying with the Marine Equipment Directive (MED)