

ARTE CONTRACT

LUXURIOUS 54" VINYL WALLCOVERINGS FOR THE CONTRACT MARKET

Data Sheet

CONCORD

References 67240 - 67251

	# 67240 - # 67241 - # 67242 - # 67243 - # 67244 - # 67246 - # 67250 - # 67251		# 67245 - # 67247 - # 67248 - # 67249: high gloss metal foil	
	U.S. UNITS	METRIC UNITS	U.S. UNITS	METRIC UNITS
TOTAL WEIGHT	20 oz PLY 13.3 oz PSY	618 gr/lm 451 gr/m ²	20 oz PLY 13.3 oz PSY	618 gr/lm 451 gr/m ²
ROLL WIDTH	52/54 in.	132/137 cm	52/54 in.	132/137 cm
GAUGE (average):	0.018 in.	0,46 mm	0.020 in.	0,51 mm
FABRIC:	Woven		Non-woven	
REPEAT:	horizontal	N.A.	N.A.	N.A.
	vertical	N.A.	N.A.	N.A.
NOMINAL PATTERN WIDTH:	51/52 in.	129/132 cm	51/52 in.	129/132 cm
HANGING INSTRUCTIONS:	Reverse - Random match		Reverse - Random match	
TENSILE (minimum):	50 x 50 lbf	222 x 222 N	50 x 50 lbf	222 x 222 N
TEAR (minimum):	25 x 25 lbf	111 x 111 N	25 x 25 lbf	111 x 111 N
ASTM F-793:	Category V type II		Category V type II	
WA Spec:	W 101 - 2011 type II		W 101 - 2011 type II	




Specially for the contract market, Arte combines design, colour and quality in a magisteral way.

The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly

demanding market, such as fire resistance, shock resistance and washability.

This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

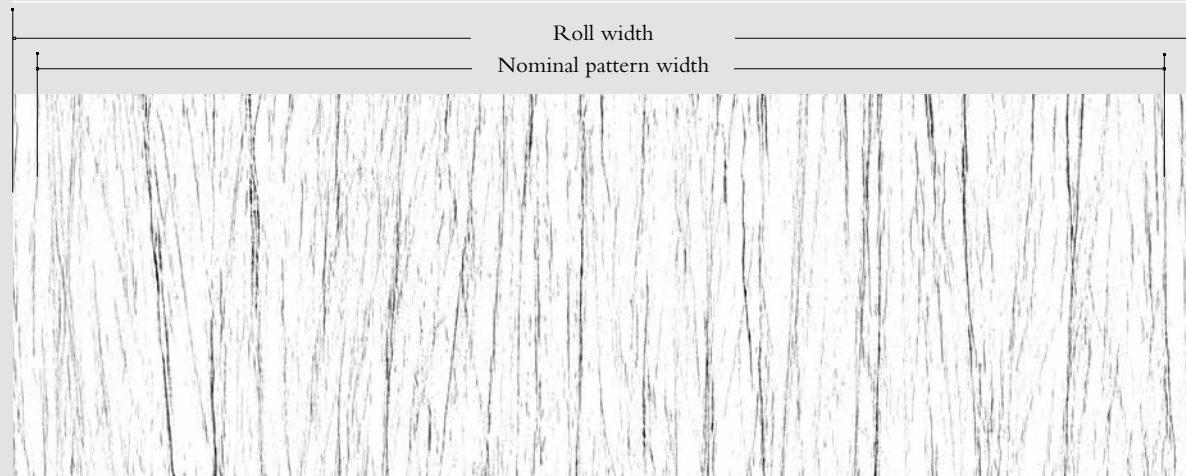


- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
 - "Gauge" is the product thickness measured after the first pattern colourway is produced.
 - "Nominal pattern width" is the expected width yield from one drop on the wall.
 - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement



67245
 # 67247
 # 67248
 # 67249

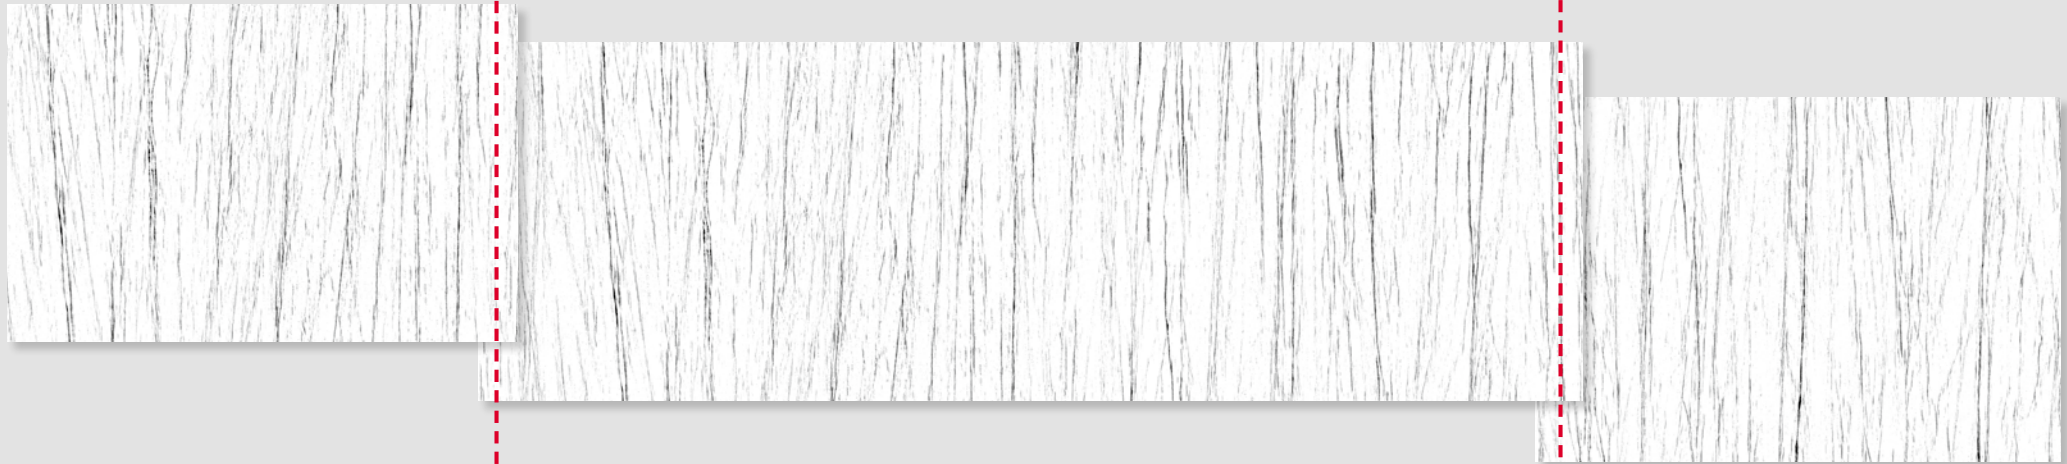

DOUBLE CUT



DOUBLE CUT

FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®
 ASTM E-84 Tunnel Test¹
 - Class A Rating
 NFPA 286 Corner Burn Test²
 - Meets requirements for Flame Spread, Smoke
 Developed and Flashover

1. When tested on GRC board with A-848-B adhesive
 2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 15102:2007 + A1:2011

Fire Behavior B
 Smoke Production s2
 Flame Droplets d0

(# 67245 - # 67247 - # 67248 - # 67249: B s1 d0)

CONCORD # 67243 - # 67246 - # 67250

These decorative metallic wallcoverings should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.



Product complying with the Marine Equipment Directive (MED)

1408/13