

ARTE CONTRACT

LUXURIOUS 54" VINYL WALLCOVERINGS FOR THE CONTRACT MARKET

Data Sheet

CORWALL

References

67460 - 67465

		U.S. UNITS	METRIC UNITS
TOTAL WEIGHT:		20 oz PLY	618 gr/lm
		13.3 oz PSY	451 gr/m ²
ROLL WIDTH:		52/54 in.	132/137 cm
FABRIC:		Woven	
REPEAT:	horizontal	N.A.	N.A.
	vertical	N.A.	N.A.
NOMINAL PATTERN WIDTH:		51 in.	130 cm
HANGING INSTRUCTIONS:		Non-reverse - Random match	
TENSILE (minimum):		50 x 50 lbf	222 x 222 N
TEAR (minimum):		25 x 25 lbf	111 x 111 N
ASTM F-793:		Category V type II	
WA Spec:		W 101 - 2011 type II	




Specially for the contract market, Arte combines design, colour and quality in a magisteral way.

The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly

demanding market, such as fire resistance, shock resistance and washability.

This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

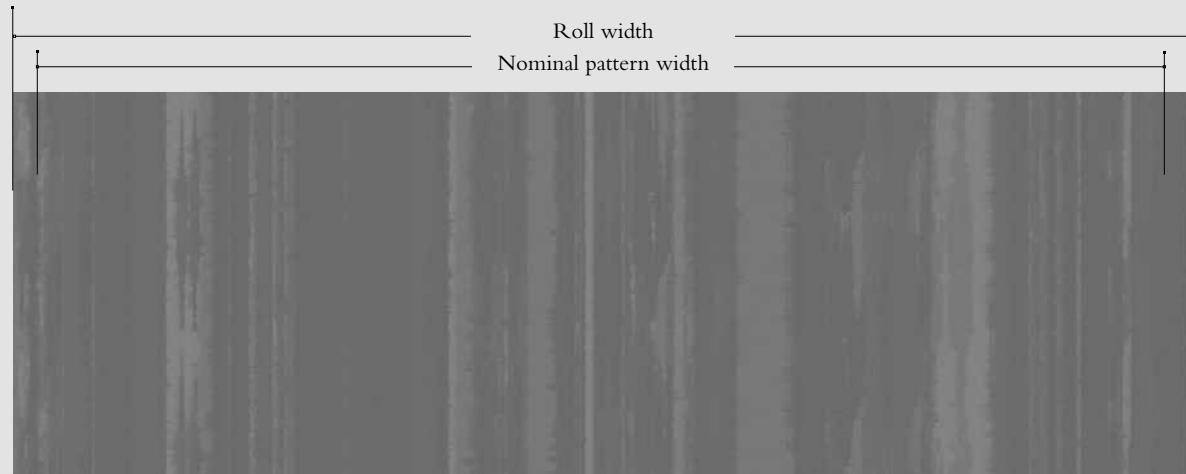

- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
 - "Nominal pattern width" is the expected width yield from one drop on the wall.
 - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement

GENERAL SPECIFICATIONS

IMPORTANT: read the hanging instructions before starting the installation.



FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®
ASTM E-84 Tunnel Test¹
 - Class A Rating
NFPA 286 Corner Burn Test²
 - Meets requirements for Flame Spread, Smoke
 Developed and Flashover

1. When tested on GRC board with A-848-B adhesive
 2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 15102:2007 + A1:2011

Fire Behavior B
Smoke Production s2
Flame Droplets d0



Product complying with the Marine Equipment Directive (MED)

1408/YY

