

# ARTE®

wallcoverings for the ultimate in refinement

[www.arte-international.com](http://www.arte-international.com)


COLLECTION **SIENNA**

LUXURIOUS 54" VINYL WALLCOVERINGS FOR THE CONTRACT MARKET

Pattern  
References

**MOSAÏC**  
47000 - 47015


		<b>U.S. Units</b>	<b>Metric Units</b>
Total weight		20 oz. PLY	620 g PLM
		13.3 oz. PSY	452 g m <sup>2</sup>
Roll width		52/54 in.	132/137 cm
Nominal pattern width		51 in.	130 cm
Gauge (average)		0.023 in.	0.58 mm
Fabric		Woven	
Repeat	horizontal	N.A.	N.A.
	vertical	N.A.	N.A.
Hanging instructions		Reverse – Random match	

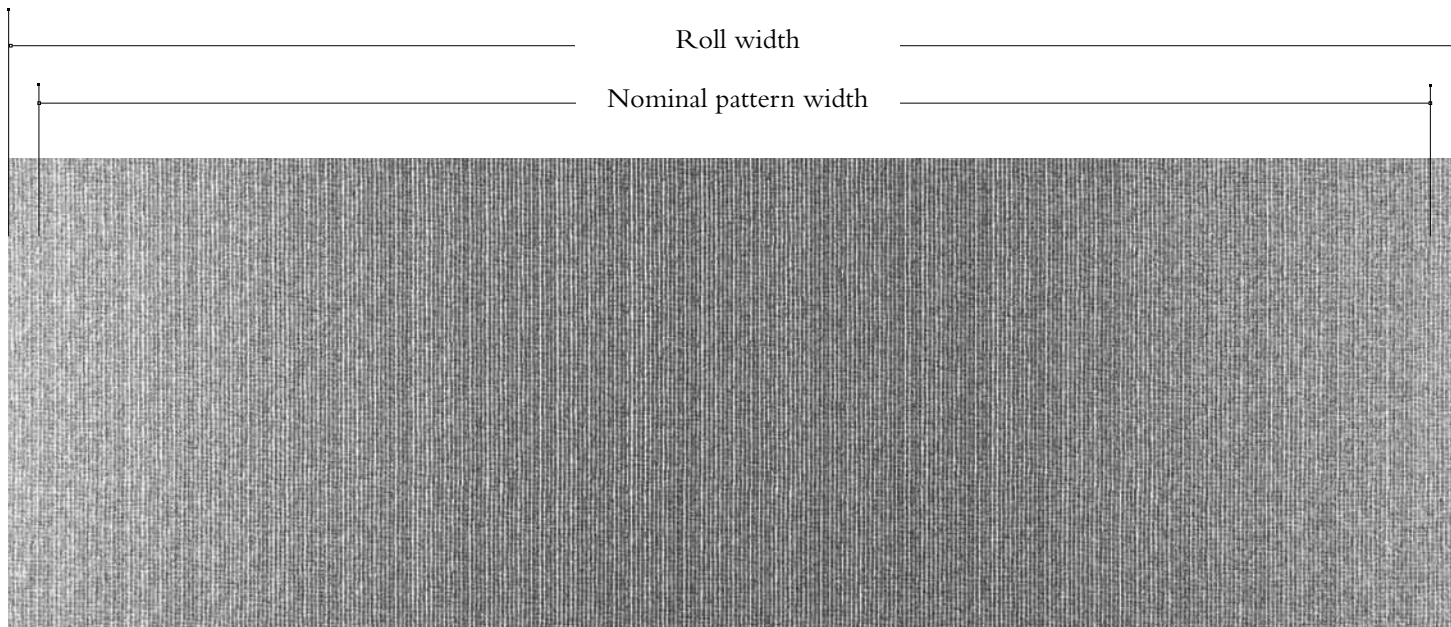

FACT SHEET

COLLECTION SIENNA

Pattern  
References  
MOSAÏC  
47000 - 47015

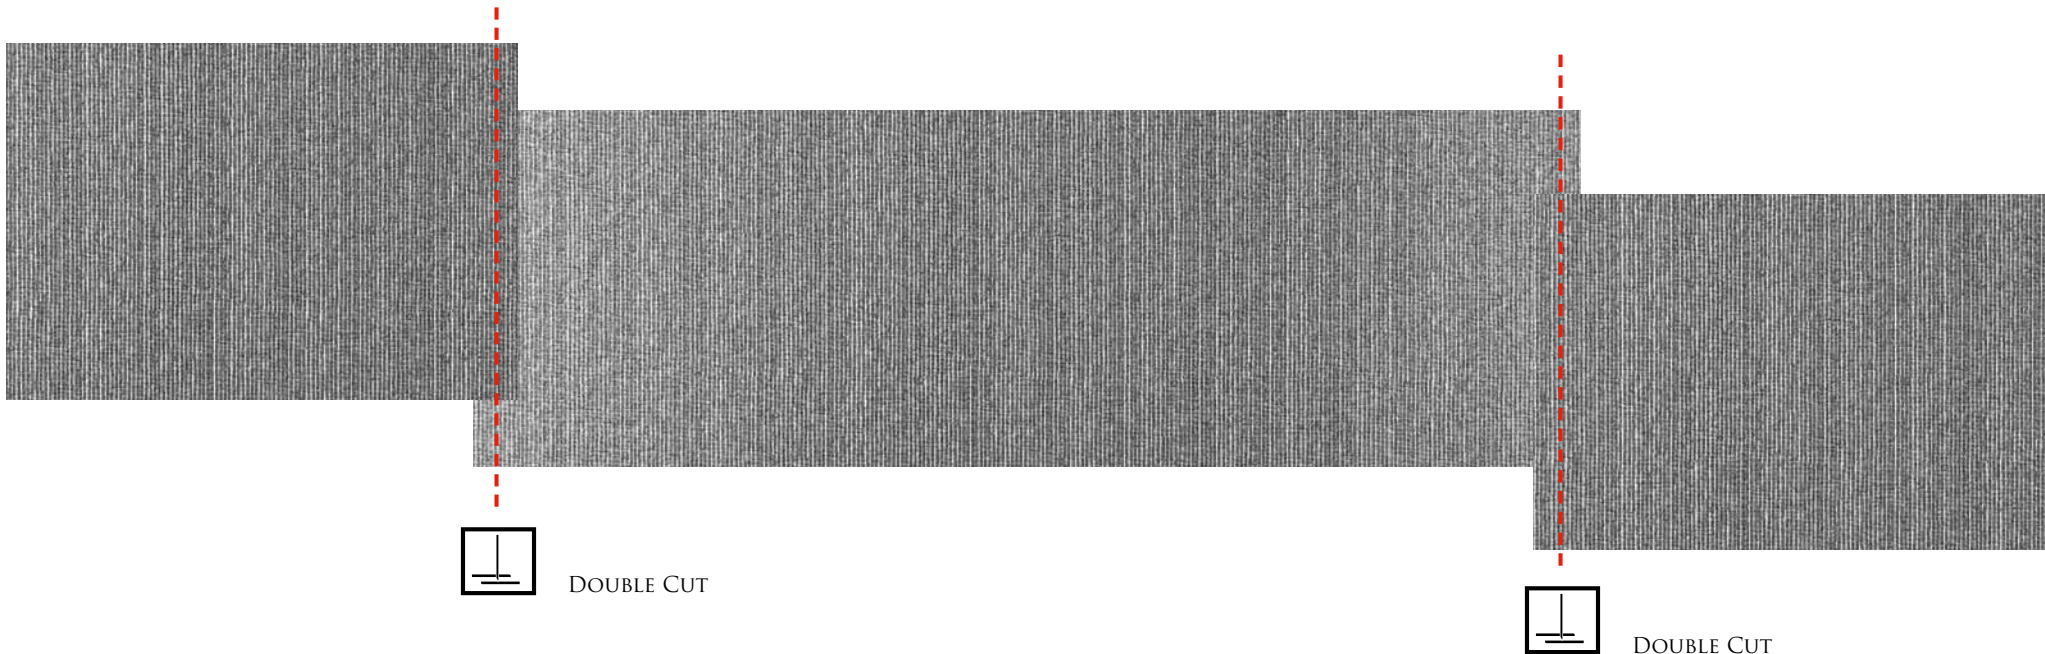

## GENERAL SPECIFICATIONS

**IMPORTANT:** read the hanging instructions before starting the installation.

### EU CLASSIFICATION

in accordance with EN 13501-1: 2007 and prEN 15102: 2004

Fire Behavior B  
Smoke Production s2  
Flame Droplets d0  
(# 47009 - #47014: B s1 d0)

### US CLASSIFICATION

Tensile (minimum): 50 x 55 lbf 222 x 245 N  
Tear (minimum): 25 x 25  
ASTM F-793 : Category V Type II  
WA Spec: W 101 - 2011 Type II

Fire Testing:

NFPA 101® Life Safety Code®

NFPA 255 (UL723, CAN S102M) Tunnel Test<sup>1</sup>

(# 47009 - # 47014: ASTM E-84 Tunnel Test<sup>1</sup> / CAN S102M)

- Class A Rating

NFPA 286 Corner Burn Test<sup>2</sup>

- Meets requirements for Flame Spread, Smoke Developed and Flashover.

1. When tested on GRC board with A-848-B adhesive

2. When tested on 5/8" Type X gypsum board with A-848-B adhesive

MOSAÏC # 47005 - # 47007 - # 47008 - # 47012 - # 47013

These decorative metallic wallcoverings should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.

Notes:

- "Roll Width" is the trim width on the specification and represents the width of the wallcovering that will be received by the customer.
- "Gauge" is the product thickness measured after the first pattern colourway is produced.
- "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.
- "Nominal Pattern Width" is the expected width yield from one drop on the wall.



Product complying with the Marine Equipment Directive (MED)

1408/13

ARTE®

www.arte-international.com