

ARTE CONTRACT

LUXURIOUS 54" VINYL WALLCOVERINGS FOR THE CONTRACT MARKET

Data Sheet

SILKX

References

67000 - 67016

		U.S. UNITS	METRIC UNITS
TOTAL WEIGHT:		15 oz PLY	464 gr/lm
		10 oz PSY	339 gr/m²
ROLL WIDTH:		52/54 in.	132/137 cm
FABRIC:		Non-woven	
REPEAT:	horizontal	N.A.	N.A.
	vertical	N.A.	N.A.
NOMINAL PATTERN WIDTH:		51 in.	130 cm
HANGING INSTRUCTIONS:		Non-reverse - Random match	
TENSILE (minimum):		30 x 30 lbf	133 x 133 N
TEAR (minimum):		12 x 12 lbf	53 x 53 N
ASTM F-793:		Category IV type I	
WA Spec:		W 101 - 2011 type II	




Specially for the contract market, Arte combines design, colour and quality in a magisteral way.

The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly

demanding market, such as fire resistance, shock resistance and washability.


This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

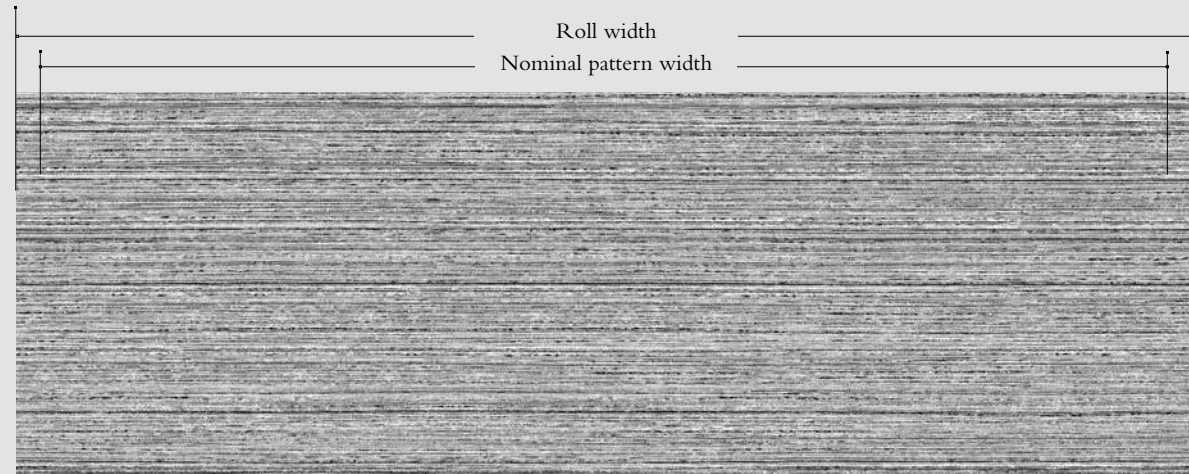

- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
 - "Nominal pattern width" is the expected width yield from one drop on the wall.
 - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement

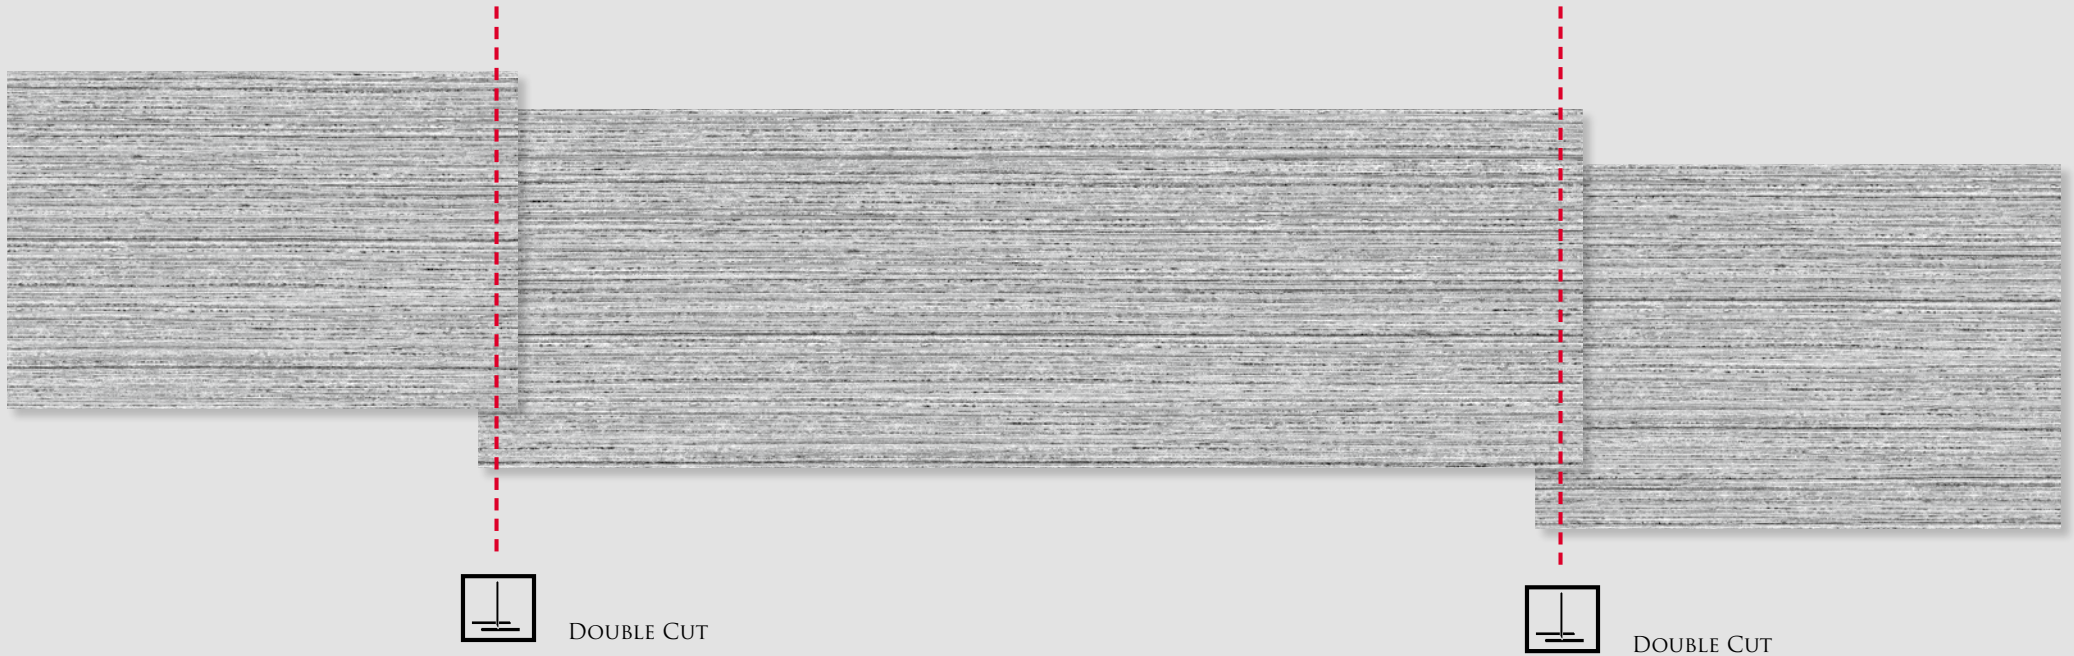

FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®
 ASTM E-84 Tunnel Test¹
 - Class A Rating
 NFPA 286 Corner Burn Test²
 - Meets requirements for Flame Spread, Smoke
 Developed and Flashover
 1. When tested on GRC board with A-848-B adhesive
 2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 13501-1:2007 and prEN 15102:2007 + A:2011
 Fire Behavior B
 Smoke Production s1
 Flame Droplets d0

SILKX # 67015

This decorative metallic wallcovering should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.



Product complying with the Marine Equipment Directive (MED)

1408/13