

# ARTE CONTRACT

LUXURIOUS 54" VINYL WALLCOVERINGS FOR THE CONTRACT MARKET

Data Sheet

## STERLING

References

67200 - 67216

		U.S. UNITS	METRIC UNITS
<b>TOTAL WEIGHT:</b>		20 oz PLY	618 gr/lm
		13.3 oz PSY	451 gr/m <sup>2</sup>
<b>ROLL WIDTH:</b>		52/54 in.	132/137 cm
<b>FABRIC:</b>		Woven	
<b>REPEAT:</b>	horizontal	N.A.	N.A.
	vertical	N.A.	N.A.
<b>NOMINAL PATTERN WIDTH:</b>		51 in.	130 cm
<b>HANGING INSTRUCTIONS:</b>		Non-reverse - Random match	
<b>TENSILE (minimum):</b>		50 x 55 lbf	222 x 245 N
<b>TEAR (minimum):</b>		25 x 25 lbf	111 x 111 N
<b>ASTM F-793:</b>		Category V type II	
<b>WA Spec:</b>		W 101 - 2011 type II	




*Specially for the contract market, Arte combines design, colour and quality in a magisteral way.*

*The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly*

*demanding market, such as fire resistance, shock resistance and washability.*

*This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.*

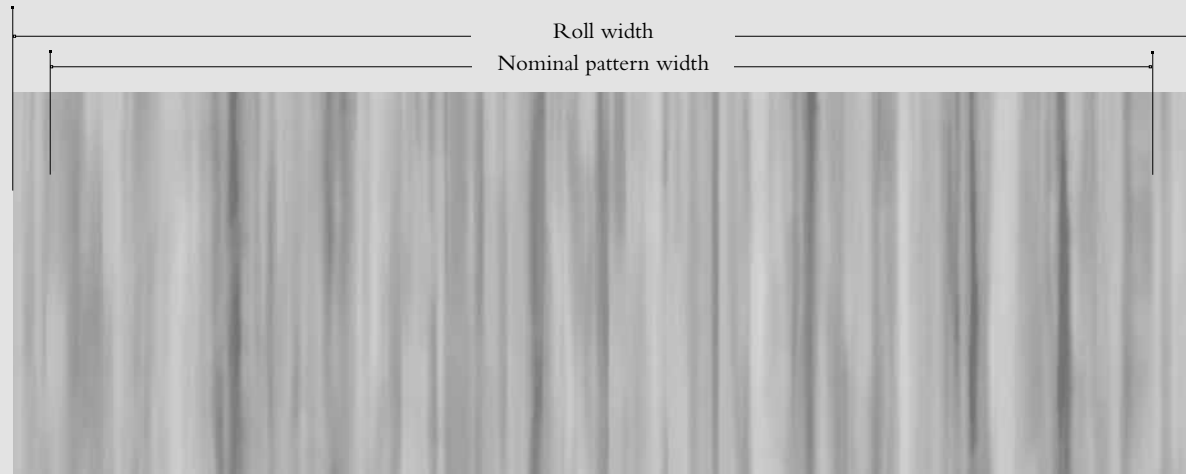

- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
  - "Nominal pattern width" is the expected width yield from one drop on the wall.
  - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement



**FIRE TESTING:**

**US CLASSIFICATION**

NFPA 101® Life Safety Code®  
 ASTM E-84 Tunnel Test<sup>1</sup>  
 - Class A Rating  
 NFPA 286 Corner Burn Test<sup>2</sup>  
 - Meets requirements for Flame Spread, Smoke  
 Developed and Flashover

1. When tested on GRC board with A-848-B adhesive  
 2. When tested on 5/8" type X gypsum board with A-848-B adhesive

**EU CLASSIFICATION**

in accordance with EN 15102:2007 + A1:2011

Fire Behavior B  
 Smoke Production s2  
 Flame Droplets d0

STERLING # 67209 - # 67213 - # 67215 - # 67216

These decorative metallic wallcoverings should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.



1408/YY

Product complying with the Marine Equipment Directive (MED)